

SONANCE



VISUAL PERFORMANCE EXTREME

Introducing the totally redesigned Visual Performance Extreme line of speakers. Engineered to handle harsh conditions while maintaining superior sound quality, Sonance Extreme Speakers are the perfect choice for patios, bathrooms or marine applications.



VPXT8R




VPXT6R




VPXT6R SST



VPXT6



VPXT6SQ




VPXT8SQ

- The XPC grille retention technology ensures the grille is held securely in place even during high pressure washing
- Designed to withstand extreme temperatures from -30° – 175°F (-34°C – 79°C)

- Conforms to IP-66 waterproof rating and Mil Spec 810 for humidity, salt spray, UV and temperature



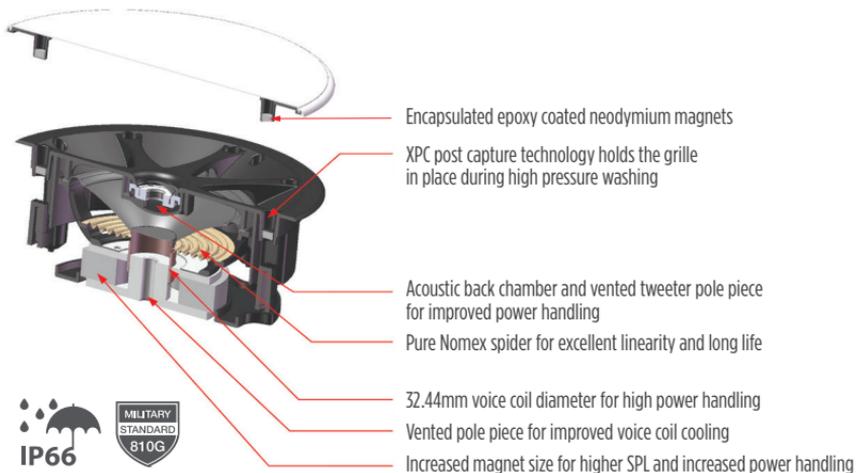

VPXT8R
SKU 93341



VPXT6R
SKU 93339



VPXT6R SST
SKU 93340



VPXT6
SKU 93338

Tweeter: 1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, dual voice coil, Ferrofluid cooled, in acoustic back chamber

1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber

Woofers: 8" (205mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround

Frequency Response: 40Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

45Hz - 20kHz ±3dB

Power Handling: 5 Watts minimum; 130 Watts maximum

5 Watts minimum; 125 Watts maximum

5 Watts minimum; 125 Watts maximum

5 Watts minimum; 125 Watts maximum

SONANCE

www.sonance.com