

SONANCE


VISUAL PERFORMANCE DATA SHEET

VP60R | VP62R | VP64R | VP66R | VP68R | SQUARE ADAPTER

TECHNICAL SPECIFICATIONS

	VP60R + VP6SQ 93088	VP62R + VP6SQ 93012	VP64R + VP6SQ 93013	VP66R + VP6SQ 93014	VP68R + VP6SQ 93015
SKU	Pair	Pair	Pair	Pair	Pair
UOM	1" (25mm) cloth dome, Ferrofluid-cooled	1" (25mm) cloth dome, Ferrofluid-cooled, pivoting, acoustic back chamber	1" (25mm) powder coated aluminum dome, Ferrofluid-cooled, pivoting, acoustic back chamber	1" (25mm) powder coated aluminum dome, Ferrofluid-cooled, pivoting, acoustic back chamber	1" (25mm) ceramic dome, Ferrofluid-cooled, pivoting, acoustic back chamber
Tweeter					
Woofers	6.5" (165mm) polypropylene cone, rubber surround	6.5" (165mm) textured polypropylene cone, rubber surround, pivoting	6.5" (165mm) textured polypropylene cone, rubber surround, pivoting	6.5" (165mm) Kevlar/ Nomex laminated cone, rubber surround, pivoting	6.5" (165mm) carbon fiber / Rohacell laminated cone, rubber surround, pivoting
Frequency Response	48Hz-20kHz +/-3dB	45Hz-20kHz +/-3dB	45Hz-20kHz +/-3dB	43Hz-20kHz +/-3dB	40Hz-20kHz +/-3dB
Impedance	8 Ohms nominal; 6 Ohms minimum	8 Ohms nominal; 6 Ohms minimum	8 Ohms nominal; 6 Ohms minimum	8 Ohms nominal; 6 Ohms minimum	6 Ohms nominal; 4 Ohms minimum
Power Handling (RMS)	5 watts minimum; 100 watts maximum	5 watts minimum; 125 watts maximum	5 watts minimum; 125 watts maximum	5 watts minimum; 140 watts maximum	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	89dB SPL	89dB SPL	89dB SPL	90dB SPL	90dB SPL
Product Dimensions (DiaxD)	9.75" x 3.75" (248mm x 95mm)	9.75" x 4.75" (248mm x 121mm)	9.75" x 4.75" (248mm x 121mm)	9.75" x 4.75" (248mm x 121mm)	9.75" x 4.75" (248mm x 121mm)
Dimensions w/ Square Grille (WxH)	9.875" x 9.875" (251mm x 251mm)	9.875" x 9.875" (251mm x 251mm)	9.875" x 9.875" (251mm x 251mm)	9.875" x 9.875" (251mm x 251mm)	9.875" x 9.875" (251mm x 251mm)
Cut-Out Dims (Dia.)	8.25" (210mm)	8.25" (210mm)	8.25" (210mm)	8.25" (210mm)	8.25" (210mm)
Shipping Weight	9 lbs. (4.1kg)	9 lbs. (4.1kg)	10 lbs. (4.5kg)	10 lbs. (4.5kg)	12 lbs. (5.5kg)

DIMENSIONAL DRAWINGS

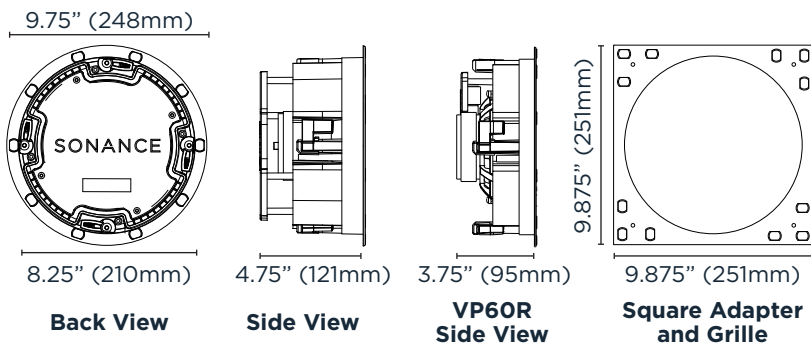

ASSOCIATED PRODUCTS

MEDIUM ROUND MODEL

VP6SQ Square Adapter w/Grille / Pair	93030
VP6SQ Square Adapter w/Grille / 5xPair	93033
Medium Round Retrofit Enclosure / Pair	92343
Medium Round Acoustic Enclosure / Each	91688
Medium Round Flex Bracket / 5xPair	92337
Fire-Rated Listed Deep Backcan / Each	92808
Medium Round Coverplate / Pair	92335

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 03.30.2021