

# SONANCE

## VISUAL PERFORMANCE DATA SHEET

### VP66 TL

#### TECHNICAL SPECIFICATIONS


SKU	<b>VP66 TL</b> 93019
UOM	Pair
Tweeter	1" (25mm) powder coated aluminum dome, Ferrofluid-cooled, pivoting, acoustic back chamber
Woofer	6.5" (165mm) Kevlar / Nomex laminated cone, rubber surround
Frequency Response	43Hz - 20kHz +/- 3dB
Impedance	8 Ohms nominal; 6 Ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB SPL
Product Dimensions (W x H x D)	8.375" x 12.25" x 2.5" (213mm x 311mm x 64mm)
Cut-Out Dims (W x H)	6.9375" x 10.75" (176mm x 273mm)
Shipping Weight	9 lbs. (4.1kg)

#### ASSOCIATED PRODUCTS

##### THINLINE MODEL


Medium Rectangle Coverplate / Pair	92334
Medium Rectangle Flex Bracket / 5xPair	93336

#### DIMENSIONAL DRAWINGS

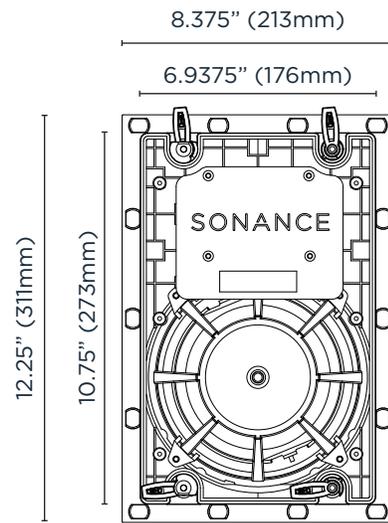

**VP66 TL**  
Front View

2.5" (64mm)



**VP66 TL**  
Side View

**LIMITED FIVE (5) YEAR WARRANTY** Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2020 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at [www.sonance.com](http://www.sonance.com).

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • [www.sonance.com](http://www.sonance.com) 12.11.2020